



FEATURES

- 3" (76 mm) diameter pump with 2" (50 mm) outlet pipework
- Powerful pump air cylinder from Hopper Topper Max
- Mobile all stainless steel construction stand with adjustable height to suit customers mixing bowl
- Adjustable pump speed
- Ergonomic power lift technology

HOPPER TOPPER POWERTOPPER

Pump stiffer products or pump over longer distances

The **Hopper Topper Powertopper** transfer pump will help keep your production flowing smooth 24/7. With our gentle pumping technology, your product will be quickly transferred without sacrificing quality.

KEY BENEFITS

- The Power Topper is ideal when used with a thicker product or over longer distances
- Pump designed to simulate hand scooping (gentle on your product)
- Ergonomic power lift allows operator to change bowls with no lifting
- Optical product sensor allows you to maintain product level in hopper resulting in improved portion control and continuous production
- Versatility – fits most standard mixing bowls from 60 to 340 quarts
- Tool free disassembly for quick and easy clean-up

SYSTEM INCLUDES

- Automatic hopper level control sensor housed in a NE-MA 4X control Box
- Quick start guide
- Spare parts kit






Photo Sensor monitors product level in the hopper and controls the pump



Specifications	Drawing	Power Lift Dimensions	Power Lift Extended Dimensions
Power Lift distance	-	30" (76 cm)	36" (91 cm)
Inside width	A	25" (63 cm)	32.4" (82 cm)
Distance between pump inlet and outlet (maximum bowl depth)	B	24.5" (62 cm)	34.2" (87 cm)
Maximum bowl clearance in UP position	C	43" (109 cm)	45.3" (115 cm)
Base frame height	D	6" (15 cm)	6.7" (17 cm)
Maximum bowl bottom-to-floor clearance	E	15" (38 cm)	11" (28 cm)
Maximum height in UP position (ceiling)	F	115" (292 cm)	127" (322 cm)
Pipe work reach	G	44" (112 cm)	44" (112 cm)
Maximum height to reach hopper	H	80" (203 cm)	86" (218 cm)



Specifications



SPEED

3 to 13 US
gallons / min

(11 to 49
L / min)



PARTICLE SIZE

Up to 1" (25
mm) cubes,
soft fruit or
similar



ELECTRICAL

Photo Sensor Only:
110 or 220 VAC, Single
Phase, 1 A, 50-60 Hz



AIR

6 CFM @ 80 psi


(170 L / min
@ 5.5 Bar)



SHIPPING INFO

Dimensions: L x W x H
53 x 38 x 20" (135 x 97 x 51 cm)

Weight: 320 lbs (145 kg)

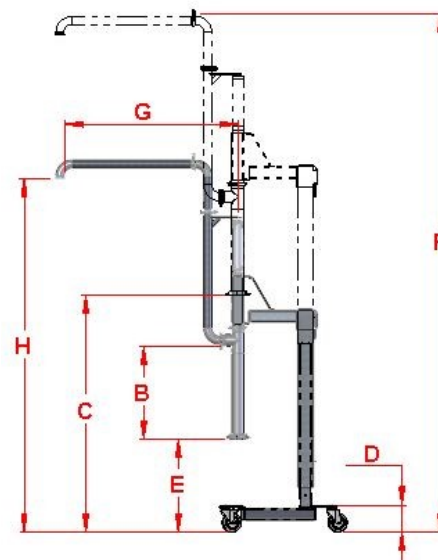

NOTE: Equipment quoted is designed to run at the quoted speed and is dependent on operator efficiency, skill, deposit size and product consistency.